



89 Pilbara Street  
Welshpool W.A. 6106  
Ph: 08 6163 3626 Fax: 08 6163 3630  
Email: [sales@westatehose.com.au](mailto:sales@westatehose.com.au)

# INDUSTRIAL PVC HOSE PRODUCTS

**TO VIEW OUR  
COMPREHENSIVE  
RANGE OF PRODUCTS  
PLEASE VISIT OUR  
WEBSITE**

**[www.westatehose.com.au](http://www.westatehose.com.au)**

**Disclaimer :**

While we endeavour to have stock of all products in our brochure, some products may not be stocked in store and may require some time to receive. For more information please contact us to discuss further your requirements.

# PVC PRESSURE HOSE

## Yellow/Blue Super Multiflex

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHYB06	6.0	12.0	230	920	0.10	20, 100, 300
PHYB08	8.0	14.0	230	920	0.14	20, 100, 300
PHYB10	10.0	16.4	230	920	0.18	20, 100, 300
PHYB12	12.5	18.9	230	920	0.22	20, 100, 200
PHYB19	20.0	27.9	230	920	0.38	20, 100
PHYB25	25.0	34.0	230	920	0.52	20, 100

### Pre-Fitted Assemblies with Quality Nitto style fittings

PHYB10NIT	10.0	16.4	230	920	0.18	10, 15, 20, 30
PHYB12NIT	12.5	18.9	230	920	0.22	20, 30



Ideal for use with air compressors and pneumatic tools.

Conforms to AS 2554-Class B

Excellent U.V. resistance


Good flexibility even at low temperatures

Operating Temperature: -5C to +60C



## Safety Yellow S Air/Water

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHYS19	20.0	28.0	230	920	0.38	20, 100
PHYS25	25.0	34.8	230	920	0.52	20, 100
PHYS32	32.0	42.0	230	920	0.90	20, 100
PHYS38	38.0	48.0	230	920	1.07	20, 60
PHYS50	50.0	62.0	230	920	1.46	20, 40



Ideal for use in heavy duty compressed air and water applications.

Conforms to AS/NZS 2554

High visibility ribbed cover provides superior resistance to abrasion.

Excellent U.V. resistance

Operating Temperature: -5C to +60C

## Blueflex Air/Water

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHBF10	10.0	16.9	230	920	0.18	20, 30, 100, 300
PHBF12	12.5	18.9	230	920	0.22	20, 30, 100, 200



Specifically designed for air tools, the hose is tough and abrasion resistant, yet extremely flexible.

Conforms to AS 2554 Class B

Ease of handling in extreme cold

Manufactured from oil resistant compounds.

# PVC PRESSURE HOSE

## Air Breathing Hose



Suitable for use in scuba diving, hookah diving, spray painting booths and sand blasting applications.  
Conforms to AS/NZS 1716 and AS/NZS 2299  
Non-toxic, kink resistant and flexible

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHAB08	8.0	15.0	348	1392	0.18	20, 100, 300
PHAB10	10.0	17.0	348	1392	0.22	20, 100, 300



## Clear Braided Multipurpose



CMP Clear Multi purpose hose is suitable for food contact and general industrial and agricultural applications.  
Conforms to AS/NZS 2070 (plastics for food contact) and AS/NZS 2554.  
Non toxic suitable for food, air, water.  
Moderate U.V. resistance.  
Operating Temperature: -5C to +60C

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHTPR06	6.0	12.0	230	920	0.09	20, 100, 300
PHTPR08	8.0	14.0	230	920	0.12	20, 100, 300
PHTPR10	10.0	16.0	230	920	0.15	20, 100, 300
PHTPR12	12.5	18.5	230	920	0.21	20, 100, 200
PHTPR16	16.0	22.0	230	920	0.27	20, 100
PHTPR19	20.0	26.0	230	920	0.35	20, 100
PHTPR25	25.0	33.0	230	920	0.52	20, 100
PHTPR32	32.0	41.5	174	696	0.72	20, 60
PHTPR38	38.0	50.5	174	696	1.46	20, 60
PHTPR50	50.0	62.5	130	520	1.89	20, 40



**WARNING: Not suitable for permanent fuel line**

**(NON TOXIC FOOD GRADE: AS / NZS 2070)**

## Drum Pump



Used to transfer diesel fuel with hand operated drum pumps and in gravity applications.  
High rubber content gives good resistance to diesel, as well as mineral oils and some fuels.  
Excellent U.V. resistance.

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHPUMP20	19.0	27.6	203	812	0.35	20, 100
PHPUMP25	25.0	32.5	230	920	0.55	20, 100



# PVC PRESSURE HOSE

## Black Fire Reel Hose

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHFR19	19.0	26.0	145	580	0.35	20, 25, 36, 100
PHFR25	25.0	34.1	145	580	0.55	20, 25, 30, 100

### Also available in Yellow Cover

PHFRY19	19.0	26.0	145	580	0.35	20, 36, 100
---------	------	------	-----	-----	------	-------------

### Yellow Cover also available as Fitted Assemblies

PHFRY19**F	19.0	26.0	145	580	0.35	20, 36
------------	------	------	-----	-----	------	--------



Designed for use with fire reels or fire fighting, it can also be used as an inexpensive general purpose water delivery hose.

Conforms to AS/NZS 1221

Excellent U.V. resistance.

## Pastoral Washdown

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHWD19	19.0	27.9	145	580	0.38	20, 100
PHWD25	25.0	35.0	145	580	0.52	20, 100
PHWD32	32.0	43.0	145	580	0.90	20, 100
PHWD38	38.0	49.5	145	580	1.07	20, 60



**(NON TOXIC FOOD GRADE: AS / NZS 2070)**



Recommended for industrial and rural washdown, marine deckwash and general watering applications.

Excellent U.V. resistance.

Conforms to AS/NZS 2070 (Plastics for food contact).

## White Hot Wash

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHHW12	12.5	19.8	232	928	0.28	20, 100
PHHW19	19.0	28.0	203	812	0.48	20, 100



Designed for use in hot and cold water applications on washing machines and dishwashers.

Operating Temperature: -5C to +60C

# PVC PRESSURE HOSE

## Allrounder Red Spray



High pressure spray hose resistant to a wide range of pesticide and weedicide chemicals used in spraying applications. Also used as a high pressure airline hose.  
Excellent U.V. resistance

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHAR10	10.0	16.9	450	1800	0.20	20, 100, 300
PHAR12	12.5	19.5	450	1800	0.23	20, 100, 200
PHAR19	19.0	29.0	450	1800	0.38	20, 100
PHAR25	25.0	34.0	450	1800	0.62	20, 100



## Spraychem Black



Recommended for chemical sprays using a wide range of pesticide and weedicide chemicals.  
Outstanding chemical resistance from the PVC/Rubber alloy and polymeric plasticizer combination.  
Robust and kink resistant.

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHSPW08	8.0	14.0	290	1160	0.17	20, 100
PHSPW10	10.0	17.0	290	1160	0.22	20, 100, 300
PHSPW12	12.5	19.7	290	1160	0.27	20, 100, 200
PHSPW19	20.0	27.2	232	928	0.36	20, 100
PHSPW25	25.0	35.0	232	928	0.50	20, 100



## Eliminator PRO



Designed for applications involving the high pressure transference of pesticides, weedicides and other chemicals generally involved in horticulture.  
Abrasion & U.V. resistant.


Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHELP10	10.0	17.4	600	1800	0.22	20, 100, 200
PHELP12	12.5	20.4	600	1800	0.27	20, 100, 200
PHELP19	19.0	28.3	600	1800	0.36	20, 100
PHELP25	25.0	34.8	600	1800	0.50	20, 100

# PVC PRESSURE HOSE

## Green Tint Garden Hose

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHGHT12F	12.0	-	100	-	0.15	20, 30
PHGHT12	12.0	-	100	-	0.15	50, 100
PHGHT18F	18.0	-	100	-	0.21	20, 30, 35
PHGHT18	18.0	-	100	-	0.21	50, 100
PHGHT25	25.0	-	100	-	0.35	20, 100

*F : denotes fitted assemblies with plastic garden hose fittings*



Premium quality strong and reliable hose for general agricultural and industrial applications.

Conforms to AS 2620-1.

Excellent kink resistance.

U.V. resistant.

## Garden Hose [5 year warranty]

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHGHG12	12.0	-	101	-	0.15	18, 30, 100
PHGHG18	18.0	-	101	-	0.21	18, 30, 100
PHGHG24	25.0	-	101	-	0.35	20, 100

**Also available as Fitted Assemblies**

PHGHG12F	19.0	-	101	-	0.15	18, 30
----------	------	---	-----	---	------	--------



Heavy duty garden hose for domestic and industrial use.

Conforms to AS2620.

Excellent U.V. and kink resistance.

Guaranteed against faulty workmanship for a period of 5 years.

## Garden Hose [10 year warranty]

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHGH12	12.0	-	174	-	0.17	18, 30, 100
PHGH18	18.0	-	174	-	0.23	18, 30, 100



Premium garden hose for domestic and industrial use.

Conforms to AS2620.

Excellent U.V. and kink resistance.

Guaranteed against faulty workmanship for a period of 10 years.

Metre marked for cutting convenience.

# PVC PRESSURE HOSE

## Outboard Marine Fuel Hose



Designed for use with outboard fuel applications with portable or above deck mounted fuel tanks with exposed hose routing.

Resistant to E10, unleaded and diesel.

Excellent U.V. resistance.


Flexible and kink resistant.

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHOF08	8.0	12.5	58	-	0.18	50
PHOF10	10.0	15.5	58	-	0.22	50

**Not to be installed below deck as fuel vapour will permeate through the PVC hose.**



## Drinking Water



Premium drinking water hose. Ideal for caravans, motor homes, RVs, boats, water tanks and any other applications that requires clean and safe transfer of drinking water.

Conforms to AS/NZS 2070 and US FDA 21 CFR177.1520c

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
PHDW12	12.0	16.9	150	-	0.12	10, 20, 100
PHDW12F	12.0	16.9	150	-	0.12	10, 20
PHDWSS	12.0	16.9	150	-	0.12	10

**(NON TOXIC FOOD GRADE: AS / NZS 2070)**



## Clear Vinyl Tubing



General Purpose low pressure tube suitable for use with air, water and fluid transfer.

Ideal for low pressure food and beverage lines, especially suited for aquarium plumbing systems.

Conforms to AS/NZS 2070 (Plastics for food contact).

Good chemical resistance.

Moderate U.V. resistance.

Temperature: -5C to +60C.



Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
TCVT003	3.0	5.0	113	-	0.016	30, 200
TCVT004	4.0	6.0	101	-	0.245	30
TCVT005	5.0	8.0	87	-	0.033	30, 100
TCVT006	6.0	9.0	72	-	0.036	30, 100
TCVT008	8.0	11.0	58	-	0.054	30, 100
TCVT010	10.0	13.0	58	-	0.066	30, 75
TCVT012	12.5	15.5	58	-	0.096	30, 50
TCVT016	15.8	20.0	43	-	0.130	30
TCVT019	19.8	23.8	43	-	0.170	30
TCVT025	25.0	31.0	29	-	0.270	30
TCVT032	32.0	38.0	29	-	0.400	30
TCVT040	38.0	45.8	29	-	0.690	15, 30
TCVT050	50.0	60.0	29	-	0.930	15

**(NON TOXIC FOOD GRADE: AS / NZS 2070)**

# LAYFLAT DISCHARGE HOSE

## Low Pressure Blue

Product Code	Diameter (mm)		Approx. Width (mm) Laying flat	Working Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
LFLD025	25.0	27.5	40	99	0.16	50, 100
LFLD032	32.0	34.5	53	99	0.20	50, 100
LFLD040	38.0	42.7	66	73	0.21	50, 100
LFLD050	51.0	54.8	85	65	0.29	50, 100
LFLD065	63.0	68.4	104	58	0.40	50, 100
LFLD075	76.0	80.6	124	58	0.57	50, 100
LFLD100	102.0	107.0	165	58	0.75	50, 100
LFLD125	127.0	131.0	200	44	1.01	50, 100
LFLD150	152.0	157.2	245	44	1.25	50, 100
LFLD200	203.0	211.8	330	44	1.93	50, 100
LFLD250	254.0	262.4	398	36	2.70	50, 100
LFLD300	304.0	314.0	484	30	2.90	50, 100
LFLD350	349.0	351.8	574	30	3.55	50
LFLD400	405.0	412.9	650	30	4.20	50



Ideal for use as a drainage hose in emergency flood disaster situations, locations with relatively small difference in elevation, for temporary water supply or drainage.

Temperature: -0C to +60C

## High Pressure Red

Product Code	Diameter (mm)		Approx. Width (mm) Laying flat	Working Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
LFHD040	40.0	43.6	67	152	0.30	50, 100
LFHD050	52.5	56.5	86	152	0.42	50, 100
LFHD065	66.0	70.2	105	152	0.55	50, 100
LFHD075	78.5	82.7	126	130	0.66	50, 100
LFHD100	104.0	109.0	168	130	1.02	50, 100
LFHD150	152.0	157.4	246	102	1.85	50, 100
LFHD200	207.0	213.0	333	75	2.20	50, 100
LFHD250	254.0	259.9	400	58	2.90	50, 100



Well suited for water drainage at open pit mining and civil engineering/dam construction sites where water has to be moved at higher pressure or elevations.

Temperature: -0C to +60C

## Black Extra Heavy Duty/Dewatering

Product Code	Diameter (mm)		Approx. Width (mm) Laying flat	Working Pressure (psi)	Weight (kg/m)	Roll Length (m)
	ID	OD				
LFDW050	52.0	60.7	87	150	0.53	100, 200
LFDW063	65.0	72.6	106	150	0.74	100, 200
LFDW075	75.0	85.8	127	150	0.89	100, 200
LFDW100	102.0	111.2	169	150	1.11	100, 200
LFDW125	127.0	133.6	203	150	1.57	100, 200
LFDW150	152.0	160.5	247	150	1.77	100, 200



This is the most abrasion resistant and high pressure layflat. Its ruggedness and high tensile strength make it suitable for use in mining, irrigation, construction and dewatering applications.

# PVC SUCTION HOSE

## Grey Suction



Premium quality general purpose hose well suited for use with water, mud, grain, sand and some chemicals. Good abrasion resistance and excellent U.V. stability.

Conforms to AS/NZS 2070 (Plastics for food contact).

Outstanding U.V. stability.

Temperature: -5C to +60C.

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius (mm)	Roll Length (m)
	ID	OD				
SHHD025	25.0	31.9	130	0.39	120	20
SHHD032	32.0	39.4	116	0.53	150	20
SHHD038	38.0	46.1	101	0.69	200	20, 30
SHHD044	44.0	52.6	87	0.89	250	20
SHHD050	51.0	60.2	87	1.07	300	20, 30
SHHD063	63.0	74.4	87	1.51	400	20
SHHD075	76.0	89.6	73	2.25	450	20
SHHD100	102.0	116.0	58	3.17	600	20

(NON TOXIC FOOD GRADE: AS / NZS 2070)



## Blue Petrol & Oil



For suction or open ended discharge of environmental waste products and chemicals.

Particularly well suited for grease traps and septic tank applications. Nitrile and PVC blend ensures excellent chemical resistance and superior flexibility.

Outstanding U.V. stability.

Temperature: -5C to +60C.

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius (mm)	Roll Length (m)
	ID	OD				
SHPO025	25.0	31.9	130	0.39	120	20
SHPO032	32.0	39.4	116	0.53	150	20
SHPO038	38.0	46.1	101	0.69	200	20
SHPO050	51.0	60.2	87	0.89	300	20, 30
SHPO063	63.0	74.4	87	1.07	400	20
SHPO075	76.0	89.6	73	1.51	450	20, 30
SHPO100	102.0	116.0	58	2.25	600	20



## Black Petro Chemical



Flexible hose particularly well suited for collection of environmental waste products and chemicals. High nitrile content gives good resistance to abrasion, chemicals, animal fats, mineral oils and some fuels.

Outstanding U.V. stability.

Temperature: -5C to +60C.

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius (mm)	Roll Length (m)
	ID	OD				
SHPC020	20.0	25.8	145	0.35	100	20
SHPC025	25.0	31.9	130	0.39	120	20
SHPC032	32.0	39.4	116	0.53	150	20
SHPC038	38.0	46.1	101	0.69	200	20
SHPC050	50.0	60.2	87	0.89	300	20
SHPC063	63.0	74.4	87	1.07	400	20
SHPC075	76.0	89.6	73	1.51	450	20



# PVC SUCTION HOSE

## Armasteel [Plutone A] Clear Suction


Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius (mm)	Roll Length (m)
	ID	OD				
SHARMA006	6.0	12.2	72.5	0.13	30	60
SHARMA008	8.0	14.2	72.5	0.15	40	60
SHARMA010	10.0	16.0	72.5	0.18	50	60
SHARMA012	12.0	18.0	72.5	0.20	50	60
SHARMA016	16.0	22.4	72.5	0.27	70	60
SHARMA019	20.0	27.0	72.5	0.36	90	60
SHARMA025	25.0	33.0	58	0.51	110	60
SHARMA032	32.0	40.4	58	0.67	140	60
SHARMA040	38.0	47.0	58	0.81	180	30
SHARMA044	45.0	54.8	58	1.12	200	30
SHARMA050	50.0	60.0	58	1.25	230	30
SHARMA063	63.0	74.8	52.2	1.83	280	30
SHARMA075	76.0	88.2	52.2	2.23	340	30
SHARMA100	102.0	115.0	34.8	3.40	460	20
SHARMA125	127.0	144.4	17.4	5.57	640	20
SHARMA150	151.0	168.6	17.4	6.99	760	20



Transparent PVC hose reinforced with steel spiral. Resistant to most chemicals and weather agents. Ideal for suction and low pressure delivery of food liquids, beverages, fruit juices, wines, and liquors with up to 20% alcohol concentration. Temperature: -10C to +50C

## Apollo Super Elastic

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius (mm)	Roll Length (m)
	ID	OD				
SHASE025	25.0	32.6	87	0.40	100.0	30
SHASE032	31.8	40.0	87	0.58	130.0	30
SHASE038	38.1	46.8	72.5	0.70	155.0	30
SHASE044	45.0	54.0	58	0.85	180.0	30
SHASE050	50.8	61.6	58	1.02	200.0	30
SHASE063	63.5	73.4	58	1.40	260.0	30
SHASE075	76.2	87.0	43.5	1.70	310.0	30
SHASE100	102.0	115.4	43.5	2.70	410.0	30
SHASE125	127.0	142.0	36.2	3.80	510.0	20
SHASE150	152.4	170.0	29	5.00	610.0	20

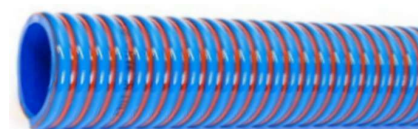

PVC hose with anti-shock rigid PVC helix. Flexible even at low temperatures and used for waste management, agriculture, suction and transport of liquids. Particularly suitable to be used on tank trucks. Temperature: -25C to +60C

## Suckaflex/Kanaflex Bulk Material Anti-Static

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius (mm)	Roll Length (m)
	ID	OD				
SHKAR040	38.0	46.2	45	0.55	51	30.5
SHKAR050	51.0	59.7	40	0.74	63	30.5
SHKAR063	63.0	74.9	35	1.31	63	30.5
SHKAR075	76.0	88.9	35	1.64	76	30.5
SHKAR100	102.0	117.6	30	2.63	114	30.5
SHKAR125	127.0	146.3	30	3.68	127	30.5
SHKAR150	152.0	170.9	30	4.58	234	30.5
SHKAR200	203.0	229.6	30	8.41	381	15.2



Used where abrasive materials handling is needed, such as sand, gravel, cement, glass, fly ash, metals, rock salts and slurries. Temperature: -34C to +70C

# PVC SUCTION HOSE

## Yellowtail Heavy Duty Suction



A robust suction and open ended discharge hose well suited for use in extreme conditions. Well suited for use with abrasive slurries, waste trucks, many chemicals and high volume air seeding applications.

Product Code	Diameter (mm)		Working Pressure (psi)	Minimum Bend Radius [mm]	Vacuum Rating (mm hg)	Roll Length (m)
	ID	OD				
SHYT050	50.0	63.4	73	350	800	30
SHYT063	63.0	79.6	58	380	800	30
SHYT075	76.0	93.4	58	400	800	30
SHYT100	102.0	118.0	43	600	800	30



## Hiflex / Marineflex Light Corrugated Suction



Smooth bore lightweight suction hose well suited as an open ended discharge hose for bilge pumps, pond pumps and commonly used as a waste hose for caravans or RV's. Conforms to AS/NZS 2070 (plastics for food contact).

Product Code	Diameter (mm)		Working Pressure (psi)	Minimum Bend Radius [mm]	Vacuum Rating (mm hg)	Roll Length (m)
	ID	OD				
SHHIFLEX20	19.0	24.7	29	90	310	20
SHHIFLEX25	25.0	31.1	29	95	310	20
SHHIFLEX28	28.0	34.9	29	105	310	10, 20
SHHIFLEX32	32.0	38.9	29	115	310	20
SHHIFLEX38	38.0	44.9	29	140	310	20
SHHIFLEX50	50.0	56.9	29	180	310	20

(NON TOXIC FOOD GRADE: AS / NZS 2070)



## White Sanitation




For use as a sanitation suction or open ended discharge hose within the recreation industry for boats, caravans and recreational vehicles. Excellent U.V. resistance.

Product Code	Diameter (mm)		Working Pressure (psi)	Minimum Bend Radius [mm]	Vacuum Rating (mm hg)	Roll Length (m)
	ID	OD				
SHSAN019	19.0	25.8	131	110	624	20
SHSAN025	25.0	31.9	131	120	624	20
SHSAN038	38.0	46.1	87	200	624	20



## Saturno Clear/Blue

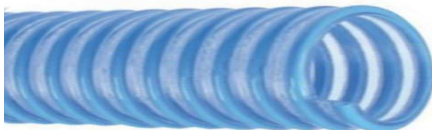

Used for the suction and open ended discharge in irrigation, fertilisers, insecticides, acids and detergents, food powders, light grains and other liquids in general.

Product Code	Diameter (mm)		Working Pressure (psi)	Minimum Bend Radius [mm]	Weight (kg/m)	Roll Length (m)
	ID	OD				
SHSBC020	20.0	24.6	101.5	110	0.24	20, 50
SHSBC025	25.0	30.6	87	130	0.30	20, 50
SHSBC032	31.8	38.0	72.5	155	0.39	20, 50
SHSBC038	38.1	44.8	58	180	0.52	20, 50
SHSBC045	45.0	52.6	58	215	0.67	20, 50
SHSBC050	50.8	60.2	58	235	0.80	20, 50
SHSBC063	63.5	71.4	58	290	0.90	20, 50
SHSBC075	76.2	85.4	43.5	340	1.38	20, 50
SHSBC100	102.0	114.0	43.5	470	2.20	20, 50

# PVC SUCTION HOSE

## Redline Wine/Food/Beverage

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius [mm]	Roll Length (m)
	ID	OD				
SHSFB025	25.0	31.9	130	0.60	120	20
SHSFB032	32.0	39.4	116	0.71	150	20
SHSFB038	38.0	46.1	101	0.82	200	20
SHSFB050	50.0	60.2	87	1.20	300	20
SHSFB063	64.0	74.0	73	1.73	400	20
SHSFB075	76.0	89.6	73	2.29	450	20
SHSFB100	102.0	116.0	58	3.33	600	20



**(NON TOXIC FOOD GRADE: AS / NZS 2070)**



Suitable for suction and open ended discharge of liquids requiring a food grade hose in applications including wineries, canneries, milk and general food processing plants. Conforms to AS/NZS 2070 (plastics for food contact), USA FDA CFR21 & EU 2002-72-EC. Suitable for wine & spirits up to 28% proof. Manufactured from Phenol & Phthalate free compound. Temperature: -5C to +60C.

## Clearview SP

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius [mm]	Roll Length (m)
	ID	OD				
SHCVSP025	25.0	35.4	175	0.68	130	30
SHCVSP038	38.0	49.9	175	1.01	220	30
SHCVSP050	51.0	64.4	145	1.67	300	30
SHCVSP075	76.2	92.4	145	2.57	400	20




**(NON TOXIC FOOD GRADE: AS 2070)**



Both a suction and delivery hose for use in wineries, milk processing plants & tankers, other liquids that require food grade hose. Conforms to AS 2070 and EU 2022-72-EC. U.V. light resistant. PVC helix, and phenol free. Temperature: -5C to +60C.

## Plutone Bio Press

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius [mm]	Roll Length (m)
	ID	OD				
SHBP020	20.0	29.0	203	0.48	90.0	60
SHBP025	25.0	35.0	174	0.66	110.0	60
SHBP032	32.0	43.0	159	0.89	140.0	60
SHBP038	40.0	51.0	145	1.08	170.0	30
SHBP050	50.0	63.0	116	1.65	230.0	30

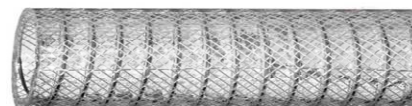

Ideal solution for suction and delivery of food liquids, beverages, fruit juices, wine and liquors with up to 50% alcohol concentration as well as milk and dairy products .It is often used for filling machines and dispensers. Food grade, according to Reg. EU 10/2011 (classes A,B, C and D1) and to FDA Regulations (CFR 21 Item 176.170). Suitable for passage of milk and dairy products.

# PVC SUCTION HOSE

## Blackline Clear/Black Airseeder



For dry suction and open ended discharge of seeds and grains in Primary, Secondary, and Tertiary air seeder lines, can also be used for suction or delivery of water & other media. Excellent U.V. and abrasion resistance. Smooth bore for maximum flow. Good resistance to chemicals. Conforms to AS/NZS 2070

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius [mm]	Roll Length (m)
	ID	OD				
SHASB025	25.0	31.9	116	0.60	120	20
SHASB032	32.0	39.4	101	0.71	150	20
SHASB038	38.0	46.1	87	0.82	200	20
SHASB044	44.0	52.6	87	1.01	250	20
SHASB050	50.0	60.2	73	1.20	300	20
SHASB063	63.0	74.4	73	1.73	400	20
SHASB075	76.0	89.6	58	2.29	450	20
SHASB100	102.0	116.0	58	3.33	550	20

(NON TOXIC FOOD GRADE: AS 2070)



## Greenline Clear/Green Airseeder



For dry suction and open ended discharge of seeds and grains in Primary, Secondary, and Tertiary air seeder lines, can also be used for suction or delivery of water & other media. Excellent U.V. and abrasion resistance. Smooth bore for maximum flow. Good resistance to chemicals. Conforms to AS/NZS 2070

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius [mm]	Roll Length (m)
	ID	OD				
SHASG025	25.0	31.9	116	0.60	120	20
SHASG032	32.0	39.4	101	0.71	150	20
SHASG063	63.0	74.4	73	1.73	400	20

Other sizes made to order - minimum order quantities apply

(NON TOXIC FOOD GRADE: AS 2070)



## Red/Clear Airseeder



For dry suction and open ended discharge of seeds and grains in Primary, Secondary, and Tertiary air seeder lines, can also be used for suction or delivery of water & other media. Excellent U.V. and abrasion resistance. Smooth bore for maximum flow. Good resistance to chemicals. Conforms to AS/NZS 2070

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius [mm]	Roll Length (m)
	ID	OD				
SHASR025	25.0	31.9	116	0.60	120	20
SHASR032	32.0	39.4	101	0.71	150	20
SHASR038	38.0	46.1	87	0.82	200	20
SHASR044	44.0	52.6	87	1.01	250	20
SHASR050	50.0	60.2	73	1.20	300	20
SHASR063	63.0	74.4	73	1.73	400	20
SHASR075	76.0	89.6	58	2.29	450	20

(NON TOXIC FOOD GRADE: AS 2070)



# PVC SUCTION HOSE

## Opaque Grain Transfer Tube

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Vacuum Rating (mm hg)	Roll Length (m)
	ID	OD				
TGT23X30	23.0	30.0	-	0.21	-	30
TGT25X31	25.0	31.5	-	0.25	-	30, 100
TGT25X32	25.0	32.0	-	0.25	-	30, 100
TGT28X35	28.0	35.5	-	0.26	-	30, 100
TGT32X38	32.0	38.0	-	0.27	-	30, 100



Lightweight semi-rigid LDPE opaque seed transfer tubing designed for use as tertiary lines on air seeding equipment. Has high rating of U.V. stabilisers for the harsh Australian conditions.

## Black Seedflo Air Seeder

Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius (mm)	Roll Length (m)
	ID	OD				
SF25WAS	25.0	32.0	-	0.25	70	20
SF30WAS	30.5	39.5	-	0.31	85	20
SF31WAS	31.5	40.5	-	0.37	85	20
SF32WAS	32.0	41.0	-	0.38	90	20
SF33WAS	33.5	44.0	-	0.40	90	20
SF35WAS	35.0	45.0	-	0.42	90	20
SF38WAS	38.0	47.0	-	0.45	100	20
SF50WAS	50.0	63.5	-	0.85	125	20
SF63WAS	63.0	74.5	-	1.00	200	20
SF75WAS	76.0	88.0	-	1.10	250	20
SF100WAS	102.0	114.0	-	2.00	400	20



Flexible medium to light duty vacuum and delivery hose for airseeding machines. Excellent U.V. and abrasion resistance. Corrugated for maximum flexibility.

## Apollo Grey Suction


Product Code	Diameter (mm)		Working Pressure (psi)	Weight (kg/m)	Minimum Bend Radius (mm)	Roll Length (m)
	ID	OD				
SHHD125	127.0	142.0	36	3.60	750	20
SHHD150	150.0	169.2	28	6.30	900	20



Suction and delivery of water, mud, acids, wood shavings, latex, grains and other mild abrasive materials. Used in agriculture, ships, silos and general industry.

# NYLON PRESSURE TUBING

## Flexible Nylon Tubing - Imperial

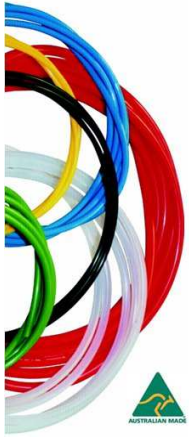

### \*\* Colour:

B for Black  
N for Natural  
Y for Yellow  
R for Red  
G for Green  
BL for Blue

Product Code	Diameter (inch)		Working Pressure (psi)	Burst Pressure (psi)	Minimum Bend Radius (inch)	Roll Length (m)
	OD	ID				
TIBL*03	1/8	0.087	250	1000	0.75	100, 300
TIBL*05	3/16	0.125	250	1000	1.00	100, 300
TIBL*06	1/4	0.169	250	1000	1.50	100, 300
TIBL*08	5/16	0.214	250	1000	2.00	100, 300
TIBL*10	3/8	0.258	250	1000	2.50	100, 300
TIBL*12	1/2	0.347	250	1000	3.50	100, 300
TIBL*16	5/8	0.495	125	500	4.37	50, 100
TIBL*19	3/4	0.590	125	500	5.25	50, 100
TIBL*25	1	0.820	125	500	7.00	50

This tube is designed from polyamide material and is designed to improve mechanical performance, reduce installation and maintenance costs and it has excellent abrasion and impact resistance. This tube is recommended for the conveyance of gases, liquids and air at high pressure and at operation temperatures of -20 to 80 degrees C. Features good chemical resistance and U.V. stabilisation.

## Semi-Rigid Tubing - Imperial



### \*\* Colour:

B for Black  
N for Natural

Product Code	Diameter (inch)		Working Pressure (psi)	Burst Pressure (psi)	Minimum Bend Radius (inch)	Roll Length (m)
	OD	ID				
TIYL*03	1/8	0.078	625	2500	0.75	100
TIYL*05	3/16	0.110	625	2500	1.25	100
TIYL*06	1/4	0.147	625	2500	1.75	100
TIYL*08	5/16	0.186	625	2500	2.25	100
TIYL*10	3/8	0.224	625	2500	3.00	100
TIYL*12	1/2	0.303	625	2500	4.00	100

This tube is designed from polyamide material and is designed to improve mechanical performance, reduce installation and maintenance costs and it has excellent abrasion and impact resistance. This tube is recommended for the conveyance of gases, liquids and air at high pressure and at operation temperatures of -20 to 80 degrees C. Features good chemical resistance and U.V. stabilisation.

## Flexible Nylon Tubing - Metric



### \*\* Colour:

B for Black  
N for Natural  
Y for Yellow  
R for Red  
G for Green  
BL for Blue

Product Code	Diameter (mm)		Working Pressure (psi)	Burst Pressure (psi)	Minimum Bend Radius (mm)	Roll Length (m)
	OD	ID				
TMBL*03	4.00	2.70	290	1160	28.0	100, 300
TMBL*05	5.00	3.30	290	1160	35.0	100, 300
TMBL*06	6.00	4.00	290	1160	42.0	100, 300
TMBL*08	8.00	5.20	290	1160	56.0	100, 300
TMBL*10	10.00	6.60	290	1160	70.0	100, 300
TMBL*12	12.00	8.00	290	1160	84.0	100

This tube is designed from polyamide material and is designed to improve mechanical performance, reduce installation and maintenance costs and it has excellent abrasion and impact resistance. This tube is recommended for the conveyance of gases, liquids and air at high pressure and at operation temperatures of -20 to 80 degrees C. Features good chemical resistance and U.V. stabilisation.

# NYLON PRESSURE TUBING

## Air Brake Tubing - Imperial

Product Code	Diameter (inch)		Working Pressure (psi)	Type	Minimum Bend Radius (inch)	Roll Length (m)
	OD	ID				
TIAB*03	1/8	0.080	150	A	0.75	250
TIAB*05	3/16	0.117	150	A	1.14	250
TIAB*06	1/4	0.171	150	A	1.50	100
TIAB*08	5/16	0.236	150	A	1.88	100
TIAB*10	3/8	0.252	150	B	2.25	25, 100
TIAB*12	1/2	0.376	150	B	3.00	25, 100
TIAB*16	5/8	0.441	150	B	3.75	25, 100
TIAB*19	3/4	0.566	150	B	4.50	25, 100

**\*\* Colour:**

B for Black  
BL for Blue  
R for Red  
G for Green



air brake tubing is made from poly-amide (nylon) to meet requirements of SAE J844 and DOT FMVSS 571.106 specifications. They are developed specifically for air brake applications in trucks and trailers. They can also be used in a wide range of instrumentation and secondary air systems. The tubes are rated up to 150 PSI working pressure @ 23°C and have a wide range of operating temperatures (-40°C to +93°C). They provide good resistance against ageing caused by heat and light. Made in Australia. Type A tubes are of single wall construction. Type B tubes have a double wall construction with a nylon core, synthetic fibre braid and a nylon cover.

## Suzi Coil Airbrake Tube


Product Code	ID (inch)	Type	TAIL LENGTH	Roll Length (m)
TNSZ1203	1/2	J844	Standard	3.0
TNSZ12037	1/2	J844	Long	3.7



Suzi coil Air Brake System is manufactured from Nylon. Designed specifically for the transfer of air between the prime mover and semi-trailer, although other applications such as truck, trailer combinations are often used. Suzi coils are SAE J844, helically coiled to give the desired working length, and retractable to a very short length to store out of the way when not in use. Long tail Suzi coils have a 1 metre tail for applications where the air connections are elevated 1m above the chassis.

## Nylon Recoil Airhose (Self-Store)

Product Code	Diameter (inch)		Working Pressure (psi)	Burst Pressure (psi)	Weight (kg/m)	Roll Length (m)
	OD	ID				
TNSS06	1/4	0.312	180	720	0.020	28
TNSS10	3/8	0.467	180	720	0.042	26
TNSS12	1/2	0.625	150	600	0.079	23
TNSS19	3/4	0.900	125	600	0.137	19

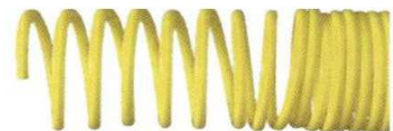

Recoil air hose is a helically formed tube using Nylon. It is lightweight, extremely strong, abrasion resistant and has excellent chemical resistance characteristics. It retains its properties and resilience over a wide range of operating temperatures. As such, it is ideal for the conveyance of liquids and gases, eg: water cooling required by processing machinery, air supply to pneumatic applications and conveyance of oil, paint lacquer and adhesives to point of usage.